


2018/19 LGF Transport
Business Case Report
Sustainable Interventions
Supporting Growth

CO04300618/005 Revision 01 January 2018



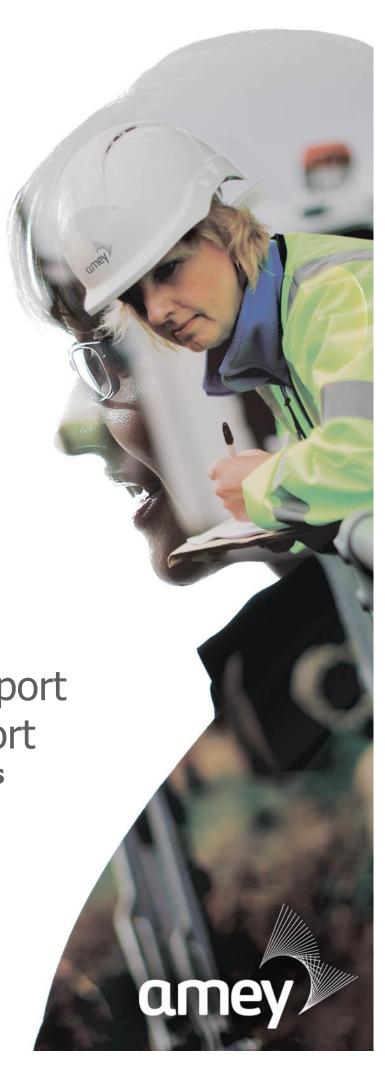

# **Document Control Sheet**

Project Name:	Sustainable Interventions Supporting Growth
Project Number:	CO04300618
Report Title:	2018/19 LGF Transport Business Case Report
Report Number:	005

Issue Status/Amendment	Prepared	Reviewed	Approved
00 (Draft for	Name:	Name:	Name:
Comment)	Steve Whittaker	Margaret Nicholls	Steve Whittaker
	Signature:	Signature:	Signature:
	Date: 23/11/17	Date: 23/11/17	Date: 24/11/17
01 (Revision for Gate 1	Name:	Name:	Name:
Review Comments)	M Nicholls	Gareth Elphick	Jeff Webb
,		·	
	Signature:	Signature:	Signature:
	Date: 04/01/18	Date: 04/01/18	Date: 05/01/18
02 (Revision for Gate	Name:	Name:	Name:
1)	M Nicholls	Gareth Elphick	Jeff Webb
	Signature:	Signature:	Signature:
	Date: 08/01/18	Date: 08/01/18	Date: 08/01/18
	Name:	Name:	Name:
	Signature:	Signature:	Signature:
	Date:	Date:	Date:



# **Contents**

1	Intro	oduction	1
	1.1	SELEP Schemes – Business Case Preparation	1
	1.2	Specific Scheme	1
	1.3	Context of the Transport Business Case	3
	1.4	Purpose of Report	4
2	Sche	eme Summary	5
	2.1	Introduction to Project	5
	2.2	Detail of Scheme Components for KSIP (2018/19)	5
	2.3	Forward Scheme Identification and Design (2018/19)	11
3	Stra	tegic Case	13
	3.1	Overview	13
	3.2	Purpose of the Proposed Investment	13
	3.3	Strategic Context	13
	3.4	Case for Change – Rationale for the Scheme	19
	3.5	Objectives	23
	3.6	Measures of Success	24
	3.7	Constraints	24
	3.8	Inter-dependencies	25
	3.9	Stakeholders	25
	3.10	Options Considered	30
4	Ecor	nomic Case	32
	4.1	General KCC Approach to Scheme Economic Case	32
	4.2	Proportionality Assessment	34
	4.3	BCR	36
	4.4	Qualitative Assessment	36
	4.5	Benchmarking	39
	4.6	Value for Money Statement	39
5	Fina	ancial Case	40
	5.1	Introduction	40
	5.2	Capital Cost Components at 2016 Prices	40
	5.3	Inflation to 2017 Prices	41
	5.4	Ouantitative Risk Assessment	41



	5.5	Final Scheme Costs	41
	5.6	Spend Profile	42
	5.7	Whole Life Costs	42
	5.8	Section 151 Officer Sign Off	42
	5.9	Funding Assumptions	42
6	Com	nmercial Case	. 43
	6.1	Scheme Procurement Strategy	43
	6.2	Potential for Risk Transfer	44
7	Man	agement Case	. 45
	7.1	Introduction	45
	7.2	Project Plan	45
	7.3	Governance, Organisation Structure, Roles and Assurance	45
	7.4	Suitability and Availability of Resources	48
	7.5	Evidence of Previously Successful Scheme Delivery	48
	7.6	Risk Management	51
	7.7	Benefit Realisation Plan and Monitoring	53
	7.8	Scheme Risks	54

# Appendix A S151 Officer Letter



### 1 Introduction

# **1.1** SELEP Schemes – Business Case Preparation

1.1.1 Amey have been commissioned by Kent County Council (KCC) to prepare a Transport Business Case (TBC) for the Kent Sustainable Interventions Programme (KSIP), appropriate to the modest size and scope of this scheme, alongside similar bids for KCC projects which have been allocated Local Growth Fund (LGF) finance by the South East Local Enterprise Partnership (SELEP).

# 1.2 Specific Scheme

- 1.2.1 This scheme, as in previous submissions to the SELEP, is titled

  Kent Sustainable Interventions Programme (Supporting Growth Delivery)
- 1.2.2 In essence, the Kent Sustainable Interventions Programme (KSIP) scheme involves the delivery of smaller schemes which bridge a gap to larger, particularly LEP, schemes. The sustainable transport schemes funded under this element of the LGF programme are designed to complement these larger interventions and are designed to maximise the benefits for example by:
  - 'Locking in' the decongestion benefits of highway schemes such as junction improvements by encouraging users to switch to walking, cycling and public transport through the provision of complementary facilities such as crossings, footway improvements, bus priorities and cycle lanes;
  - Increasing the usage of public transport schemes (including rail) by providing improved facilities to access the service. Cycle stands at a rail station or footpath improvements to a bus stop from a housing estate would be good examples;
  - Improving sustainable access within and into developments (e.g. housing, employment, education, healthcare) to encourage the use of walking, cycling and public transport. This will in turn improve social cohesion, provide healthy exercise and community safety as well as reducing car journeys;
  - Providing non-car access to facilities to enable those without cars to participate in the activities or facilities there; and
  - Complementing the above with Smarter Choices initiatives such as publicity and travel plans which encourage the use of sustainable modes of travel.
- 1.2.3 The KSIP schemes are identified on an annual basis and will vary from year-to-year.



Many are 'sustainable transport' schemes, including walking, cycling and public transport initiatives. However, small scale public realm or minor highway schemes may also be brought forward under this programme. The annual programme is based on a £0.5m pa funding bid, adding up to a total of £3.0m over the six financial years to March 2021.

- 1.2.4 It has previously been decided to submit the schemes on a year-by-year basis. The first three years of the six year programme have already been approved (Amey reports CO04300262\_026~03, CO04300369\_015~00 and CO43000496\_003~02). This report considers the fourth year (2018/19) of the programme.
- 1.2.5 The 2018/19 scheme funding bid comprises:
  - Sloe Lane Cyclepath Upgrade (Thanet District);
  - A228 Holborough Proposed Puffin Crossing (Tonbridge & Malling Borough); and
  - A2070 Barrey Road Junction Improvements (Ashford Borough).





1.2.7 below.





Figure 1-1: 2018/19 KSIP Scheme Locations

1.2.8 Where the proposed component schemes for 2018/19 have links to other LGF schemes, these are shown in Table 1-1 below:

2018/19 KSIP Component	Wider LGF Scheme/Development
Sloe Lane – Cyclepath Upgrade	Westwood (Thanet) expansion
A228 Holborough – Proposed Puffin Crossing	St Peter's Village (HCA) / Tonbridge and Malling Local PLAN
A2070 Barrey Road – Junction Improvements	M20 Junction 10a / Ashford Growth Area

**Table 1-1: Links to Other LGF Schemes** 

# 1.3 Context of the Transport Business Case

1.3.1 Currently promoters of all schemes involving an investment of public funds over £5m ('major schemes') are required to prepare and submit a Transport Business Case.



Previously a Business Case would be submitted to the Department of Transport (DfT).

- 1.3.2 Recent Government policy changes have involved the devolution of decision making for smaller major schemes to Local Enterprise Partnerships (LEPs). These bodies are designed to direct investment for an area based on economic priorities set through a partnership which is private-sector led. Kent County Council is in the South East LEP (SELEP) area.
- 1.3.3 The devolved funding arrangements were put in place in July 2014 through the Local Growth Deal announcements, including devolution of funds to the SELEP.
- 1.3.4 This Transport Business Case which will be submitted to the SELEP effectively forms a bid to request confirmation of the already allocated LGF funding for the scheme.
- 1.3.5 The methodology used to assess value for money and the degree of detail to which business cases are developed in support of particular projects or programmes should be proportionate to the funding allocated and in line with established Government guidance including the HM Treasury Green Book. Typically the Government expect business cases to address, in a proportionate manner, the 5 cases set out in supplementary guidance to the Green Book.
- 1.3.6 With a projected total expenditure totalling £3.0m the overall KSIP scheme is categorised as 'small', so the detail in this TBC has been framed in an appropriate, proportionate manner. The Year 3 (2018/19) delivery is £0.5m, comprising five schemes and a further element to support forward scheme identification and design for future years.

### **1.4** Purpose of Report

- 1.4.1 The overall purpose of this report is to provide robust evidence to SELEP of the merits of introducing the schemes in the 2018/19 Kent Sustainable Intervention Programme.
- 1.4.2 This 'small' scheme should only require a 'lighter touch' appraisal, which is generally recognised as focussing on:
  - A narrative argument supported where possible with existing information;
  - The strategic fit of the scheme; and
  - The scheme's provision of complementary support for larger schemes, which in this case include the housing, employment and commercial developments in the area.
- 1.4.3 The core of the Transport Business Case is the 5-Case Model which ensures that



### schemes:

- Are supported by a robust case for change that fits with public policy objectives
   the 'strategic case';
- Demonstrate value for money the 'economic case';
- Are commercially viable the 'commercial case';
- Are **financially affordable** the 'financial case'; and
- Are achievable the 'management case'.
- 1.4.4 This document uses this 5-Case Model in an appropriate and proportionate way to demonstrate the merit of investing in the proposed Kent Sustainable Interventions Programme.



# **2** Scheme Summary

# 2.1 Introduction to Project

- 2.1.1 This investment is designed to fund smaller transport interventions which complement larger major schemes, regeneration projects and the broader growth agenda. The success of large transport project and major development schemes can be enhanced significantly through the provision of complementary measures.
- 2.1.2 Each of the proposed 2018/19 component schemes are intended to add benefits to approved 2015/16, 2016/17 or 2017/18 LEP schemes, or providing standalone benefits in terms of connectivity or safety. As in the previous submissions, an allocation is also set aside for forward scheme identification.

# 2.2 Detail of Scheme Components for KSIP (2018/19)

2.2.1 Table 2-1 to Table 2-3 below summarise the main features of the proposed schemes that constitute the third year 2018/19 funding bid for KSIP.

Scheme	Sloe Lane — Cyclepath Upgrade
District	Thanet
Type of scheme	Cycling Improvement
Background	Sloe Lane is currently designated as a PROW Footpath (Ref TM8). It is proposed to upgrade the route under the Cycle Tracks Act to a shared use path.  The LGF funding is intended to provide a contribution to the total scheme cost.



Scheme	Sloe Lane – Cyclepath Upgrade
Objectives	Provide sustainable & affordable access to services, education, employment & health care in an area of high deprivation.
	Provide a continuous domestic and leisure route linking housing, regeneration & development (including Pinch Point funded Poorhole Lane, Westwood scheme).
	Provide a missing link in an existing cycle network and links to Viking Coastal Trail (RR15) and NCN 1. Toucan crossing on A255 installed in 2013/14 and funded by the DfT Cycle Safety Fund.
	Improve road & route safety. The A255 has a poor crash record.
Description of works	The proposed scheme comprises the widening and resurfacing of approximately 0.75m of existing footpath to provide a new shared footpath/cyclepath.
Benefits	Improved accessibility for cyclists; Improved cycle links between local residential, employment, education, retail and services; Improved route safety for all users.
Stakeholders/ Endorsement	Thanet District Council Landowner
<b>Estimated Cost</b>	£200,000 (contribution)
Current Status	The proposed scheme has been designed and approved by the Thanet JTB. Consultation has taken place with the landowner who is in agreement (subject to conditions).

Table 2-1: KSIP Detail: Sloe Lane – Cyclepath Upgrade



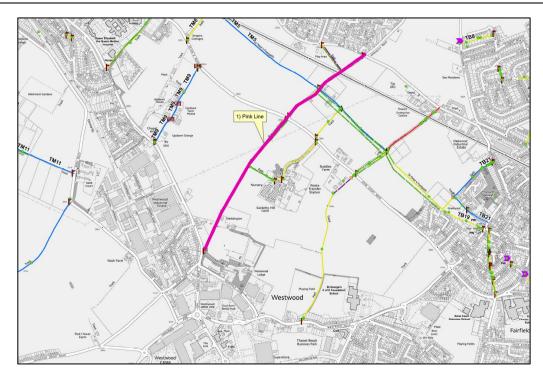


Figure 2-1: Sloe Lane Scheme Location Plan

Scheme	A228 Holborough – Proposed Puffin Crossing
District	Tonbridge & Malling
Type of scheme	Pedestrian Improvement
Background	The A228 currently acts as severance to the local community as heavy traffic flows result in poor accessibility and connectivity for pedestrians to local schools and services.
Objectives	Provide sustainable access to local services, public transport and schools;  Increased safety for pedestrians;
Description of works	It is proposed to provide a new puffin crossing facility across the A228 to replace the existing informal facility.
Benefits	Encourage greater local trips by foot as opposed to car;  Reduced risk of personal injury accidents involving pedestrians/vulnerable road users;



Scheme	A228 Holborough – Proposed Puffin Crossing
Stakeholders/	Local Residents Association
Endorsement	Snodland Town Council
	Tonbridge & Malling Borough Council
<b>Estimated Cost</b>	£120,000
Current Status	Scheme currently being designed

Table 2-2: KSIP Detail: A228 Holborough – Proposed Puffin crossing

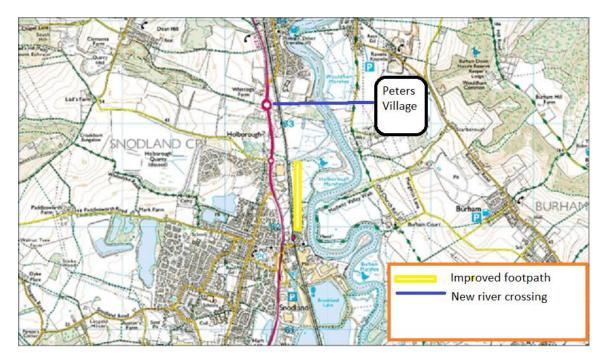


Figure 2-2: A228 Holborough Crossing - Scheme Location Plan





Scheme	A2070 Barrey Road – Junction Improvements
District	Ashford
Type of scheme	Junction/Cycleway Improvements
Background	KCC has reported on receiving regular complaints concerning the A2070/Barrey Rd junction with vehicles experiencing severe difficulty in joining the A2070 during peak periods.
	The junction falls within the red line boundary of the DCO for the adjacent Highways England (HE) scheme to provide a new motorway junction (J10a) on the M20.
	An Options Study has been undertaken to identify am appropriate scheme to improve the junction and negotiations between KCC and HE regarding the delivery of the scheme are ongoing.
	The LGF funding is intended to provide a contribution to the total scheme cost.
Objectives	The proposed scheme for the upgrade of the junction aim to manage and create an appropriate gap for the entry/exit for vehicles to/from Barrey Road above what is already provided under the existing priority controlled arrangement.  Consideration is also given to the impact of the proposed scheme options with the mainline flows along the A2070.
Description of works	The proposed scheme comprises the installation of traffic signals to control the existing turning movements. The junction would be part signalised, with all movements apart from A2070 southbound being subject to traffic signal control. The left turn only restriction out of Barrey Road would be retained.
	The scheme will also provide a new shared footway/cycleway facility on the northern side of Barrey Rd, the western side of the A2070 and connecting to Church Rd to the south.



Scheme	A2070 Barrey Road – Junction Improvements
Benefits	Reduced congestion on Barrey Rd;
	Improved road safety due to signal control;
	Improved pedestrian/cyclist accessibility;
Stakeholders/	Highways England (HE)
Endorsement	Ashford Borough Council
<b>Estimated Cost</b>	£150,000 (contribution)
Current Status	Feasibility options report, scheme design and cost estimates developed. Consultation with HE ongoing to establish delivery timetable/mechanism.

Table 2-3: KSIP Detail: A2070 Barrey Road – Junction Improvements



Figure 2-3: A2070 Barrey Road - Scheme Location Plan



# 2.3 Forward Scheme Identification and Design (2018/19)

- 2.3.1 In addition, a further sum of £30,000 has been set aside for developing schemes for future years and undertaking initial design and feasibility work relating to these. For example, pre-design work has been undertaken in 2017/18 for the Sloe Lane cyclepath upgrade which will enable the scheme to be ready for construction in 2018/19 since the initial design, stakeholder consultation; costing and preparatory works has already been undertaken.
- 2.3.2 Since the primary schemes complemented by the small-scale initiatives set out in this programme will change, it is important that the process for selection and delivery is flexible. This involves an annual review cycle undertaken by KCC and its partners which involves:
  - An ongoing review of transport schemes, their expected impacts and any opportunities to enhance these through small-scale additions;
  - Collation, scoring and ranking of schemes, using SEP/LTP criteria in relation to the added value offered by the complementary schemes for the following year;
  - Selection of a list of complementary schemes ranking most highly against their impacts;
  - Presentation to members for sign-off, particularly Joint Transportation Boards (JTBs) of district and county members;
  - Initial feasibility, design, costing and consultation work on the selected schemes to ensure each is ready for delivery in tandem with the associated principal scheme;
  - Continuous review, re-prioritisation and reprogramming to take account of changes in the scope and timescale of the principal schemes; and
  - Procurement, delivery and post-scheme monitoring of schemes as they are brought forward.
- 2.3.3 The Annual Review Cycle uses a process illustrated in Error! Reference source not found.4 which shows how candidate schemes will be selected, programmed, designed, monitored and reported.



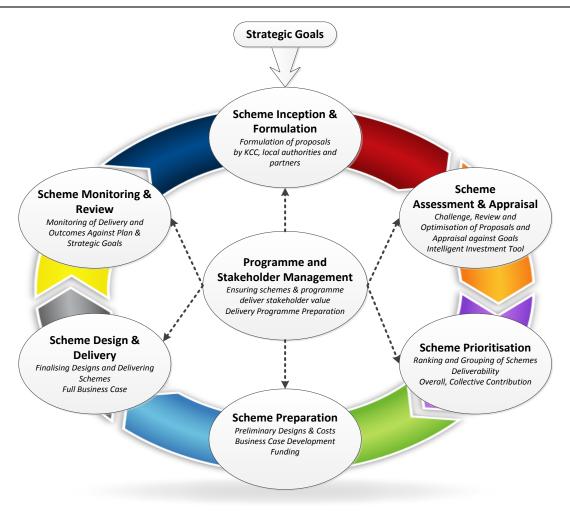


Figure 2-4: Annual Management Cycle



# **3** Strategic Case

### 3.1 Overview

3.1.1 This section sets out the 'case for change', by explaining the rationale for making investment and presenting evidence on the strategic policy fit of the proposed scheme. Detailed strategic cases have not been assembled for the 2018/19 component schemes because of the small scale of funding required, however, appropriate commentary about how these support larger LGF schemes has been added where appropriate.

# 3.2 Purpose of the Proposed Investment

- 3.2.1 The overall purpose of the investment in the KSIP scheme is to encourage cycling and walking. The needs of other road users will be made through sound design and the schemes will be linked to the wider redevelopment of town(s).
- 3.2.2 These goals are to be achieved with reference to other important factors such as the local environment and the safety of road users.

# 3.3 Strategic Context

### National Transport Priorities

- 3.3.2 The Government has long-term objectives aimed at improving the economy, environment and society. These are the three tenets against which major transport infrastructure projects are assessed, and will continue to be assessed in future.
- 3.3.3 In its National Infrastructure Delivery Plan 2016-2021, the Government presented Highways England's 8 objectives during Road Period 1:
  - Making the network safer: with a target of 40% reduction in the number of people killed or seriously injured on the SRN against the 2005-09 period by the end of 2020;
  - Improving user satisfaction: by 31 March 2017, 90% of people responding to the
     National Road Users' Satisfaction Survey need to be either fairly or very satisfied;
  - Supporting the smooth flow of traffic: minimise delay and inconvenience to road users and ensuring at least 97% of the SRN is available to road users and ensuring at least 85% of incidents are cleared within 1 hour;
  - Encouraging economic growth by working to minimise delay on the SRN;
  - Delivering better environmental outcomes;



- Helping cyclists, pedestrians and other vulnerable road users of the SRN;
- Achieving real efficiency: delivering total capital savings of at least £1.2 billion by the end of Road Period 1; and
- Keeping the SRN in good condition: including an ambitious resurfacing programme.
- 3.3.4 Local sustainable transport schemes, such as those completed under the 2015/16 and 2016/17 submissions and those proposed in this TBC, complement larger schemes which provide or enable housing, jobs and services. Sustainable transport, by transferring trips from car, also reduces carbon emissions and helps improve local air quality, both of which are important national policies. Since sustainable transport schemes 'lock in' the benefits of highway schemes and complement railway schemes, they are entirely supportive of the wider national connectivity and economic agendas.

# National Planning Policy Framework 2012

- 3.3.5 The National Planning Policy Framework (NPPF) was published in March 2012 and is designed to set out how planning authorities are expected to enable sustainable development. In order to achieve this it sets out an overarching presumption in favour of sustainable development, taking account of the three dimensions of:
  - An economic role relating to building a strong responsive and competitive
    economy. In relation to the planning system this is fundamentally about ensuring
    that sufficient land is available to enable job creation, together with the
    infrastructure to support this;
  - A social role in supporting strong, vibrant and healthy communities, with an emphasis on the provision of housing in the context of high-quality built environment and access to local services; and
  - An environmental role in terms of protecting and enhancing the local environment and helping mitigate and adapt to climate change.
- 3.3.6 Transport and connectivity play a key role in all three of these dimensions and the NPPF contains a section which outlines this and sets out a number of key requirements in terms of planning and decision making by local planning authorities. Much of this is about limiting the impacts of developments and improving their long-term sustainability. In relation to this project, this includes:



- The use of technology and the balancing of land use to reduce the need to travel and minimise journey lengths (e.g. walking to school and working from homes or local hubs);
- Balancing the transport system in favour of sustainable modes for the movement of goods and people, including priority to pedestrian and cycle movements and access to high quality public transport;
- Creating safe and secure layouts which minimise conflicts between traffic and cyclists or pedestrians, avoiding street clutter;
- Encouraging the reduction of congestion and of greenhouse gas emissions;
- The effective use of tools including Transport Statements (TS), Transport Assessments (TA) and Travel Plans (TP);
- Protection of sites and routes which could be critical in developing infrastructure to widen transport choice; and
- Inclusivity, including meeting the needs of disabled people.
- 3.3.7 This should be seen in the context of the imperatives for economic growth as set out in the South East LEP Growth Deal and Strategic Economic Plan.
- 3.3.8 The 2018/19 intervention schemes in the TBC and their focus on cycling improvements across the County are clearly consistent with this National policy.

### Cycling Delivery Plan 2014

- 3.3.9 The Department for Transport published its' Cycling Delivery Plan in 2014. It recognises the steep increase in cycling in London but aims to encourage people across England to cycle. "The government is committed to giving people a realistic choice to cycle so that anyone, of any age, gender, fitness level and income can make the choice to get on a bike."
- 3.3.10 The proposed schemes as part of this business case support the government's vision of the future of cycling by aiming to provide cycle routes which will provide direct access to services and cater for all types of cyclist.

### Active Travel Strategy 2010

- 3.3.11 The Department for Transport and the Department for Health jointly published the Active Travel Strategy in 2010. The aims are to:
  - Promote better public health and well-being by increasing levels of physical activity, particularly among the most inactive people in our society;
  - Increase accessibility and reduce congestion;



- Improve air quality and reduce carbon emissions.
- 3.3.12 "We will seek to do this by making key destinations more accessible by active modes of travel and encouraging a greater take up of active travel. We also aim to contribute to our wider road safety outcomes, by reducing the risk to cyclists and walkers of death and serious injury per km travelled in road traffic accidents."
- 3.3.13 The strategy highlights the importance and benefits of active travel, in terms of health, the environment and the economy.

### Regional Transport Priorities

South East LEP: Growth Deal and Strategic Economic Plan 2014

- 3.3.14 Local Enterprise Partnerships (LEPs) are voluntary partnerships between businesses and local authorities which are intended to determine economic priorities for an area and to take a lead in fostering economic growth and creating jobs. There are 39 LEPs in England with the South East LEP (SELEP) one of the biggest. It encompasses Thurrock, Essex and Southend to the north of the Thames, along with East Sussex, Kent and Medway to the south.
- 3.3.15 Each of the LEPs was invited by Government to submit Strategic Economic Plans as the basis for negotiating a portion of the Local Growth Fund (LGF) to be allocated over the period 2015 and 2021.
- 3.3.16 This process is linked to the devolution of local major scheme funding decisions, previously decided by the DfT, to LEPs. Although the precise details are not yet clear, the application of the Transport Business Case process and the transport appraisal guidance (WebTAG) is expected to continue, though their use is intended to be 'proportionate'.
- 3.3.17 The SELEP Growth Deal and Strategic Economic Plan emphasises the importance of 'investment in our transport growth corridors/ areas'. This is alongside the four other themes of 'building on our economic strengths'; 'boosting productivity', 'improving skills' and 'building more houses and re-building confidence'. Clearly in each of these four themes, transport and connectivity have an additional role to play.
- 3.3.18 Published in March 2014, the SELEP Strategic Economic Plan (SEP) sets out the investment strategy for the area. This document includes the SELEP bid for Local Growth Fund, the primary source of funding for this project.
- 3.3.19 A component element of this is the Kent and Medway Growth Deal which sets out



plans for the public and private sectors intent to invest over £80 million each year for the next six years to unlock potential through:

- Substantially increasing the delivery of housing and commercial developments;
- Delivering transport and broadband infrastructure to unlock growth;
- Backing business expansion through better access to finance and support; and
- Delivering the skills that the local economy needs.
- 3.3.20 The SEP involves delivering the biggest local transport programme in the country to realise the potential of the growth corridors and sites, transforming connectivity for our businesses and residents, unlocking jobs and homes, and bringing substantial benefits to the UK economy.
- 3.3.21 As part of the overall growth programme for 200,000 new private sector jobs and 100,000 new homes, there are specific plans for 7,000 jobs and 8,500 homes on the London-Maidstone-Ashford corridor over a six-year period.
- 3.3.22 These plans are supported through a programme of transport investment. This in turn includes:
  - A request for Government commitment to deliver specific national rail network, motorway, and national trunk road investments by agreed dates; and
  - A corresponding commitment from local authorities and private developers to meet a significant proportion of the costs.
- 3.3.23 These are complemented by proposals for local sustainable transport funding to ensure that growth occurs in a sustainable manner, including the 'locking in' of benefits from highway and other investments.
- 3.3.24 The selection process for schemes set out in Section 2.3 shows how future schemes are selected to contribute to SEP strategies.
  - Appraisal and Business Case Preparation
- 3.3.25 The SEP sets out the process through which schemes will be identified, appraised and prioritised for delivery. This process is based on the HM Treasury 5-Case Model. For transport schemes, the SELEP has adopted the Assurance Framework agreed between the former Local Transport Board and the Department for Transport (DfT). For smaller schemes, this sets out a 'light touch' approach geared towards the following:
  - Value for Money based on BCR and wider Economic Benefits;
  - Environmental and Community Impact Potential benefits and adverse impacts;



- Contribution to Objectives LTP, SE LEP and SELTB Objectives; and
- Deliverability affordability, practicality, key risks, stakeholder and public support.
- 3.3.26 This Transport Business Case is designed to conform to this process, though such a small scheme does not lend itself to quantitative and monetised appraisal.

### **Local Transport Priorities**

- 3.3.27 Kent is South East England's fastest recovering region and has great potential for successful economic growth. In the last 20 years, Kent has seen 100,000 more people living in the county, housing stock increase by over 60,000 homes and 130,000 more cars on roads. This pace of change is set to accelerate further over the next 20 years with a projected 8 per cent population increase, accompanied by the presence of two of the UK's four Growth Areas in Thames Gateway and Ashford.
- 3.3.28 Local growth alone is predicted to result in 250,000 extra journeys on Kent's roads by 2026. Coupled with a forecast increase in international traffic this leads to tackling congestion being regarded as one of the main priorities for Kent. KCC's framework for regeneration "Unlocking Kent's Potential" defines what Kent should look like in 20 years' time and includes as 1 of its 5 priorities "delivering growth without transport gridlock" by designing communities that will encourage walking, cycling, and healthy leisure activities.

### Local Transport Plan 4: Delivering Growth without Gridlock 2016-2031

- 3.3.29 Kent's fourth "Local Transport Plan (LTP4), 2016-31" sets out KCC's Strategy and Implementation Plans for local transport investment to 2031. It sets out policies to deliver strategic outcomes for transport and is accompanied by implementation plans and a methodology for prioritising investment in transport infrastructure.
- 3.3.30 The LTP4 aims to "deliver safe and effective transport, ensuring that all Kent's communities and businesses benefit, the environment is enhanced and economic growth is supported". The five overarching policies targeted at achieving these aims are;
  - Economic growth and minimised congestion;
  - Affordable and accessible door-to-door journeys;
  - Safer travel;
  - Enhanced environment; and
  - Better health and wellbeing.



- 3.3.31 The transport priorities are described in the LTP4 as being strategic, countywide or local. LTP4 refers specifically to the KSIP programme, for which this business case is prepared, as an integral part of the countywide plan which seeks '...to encourage users to switch to walking, cycling and public transport through the provision of facilities such as crossings, footway improvements, bus priority and cycle lanes'.
- 3.3.32 With specific regard to the component schemes in the 2018/19 KSIP programme, LTP4 identifies local aims of improving sustainable transport options in Westwood, Thanet which will be partly addressed by the Sloe Lane scheme, and providing Orbital Park and Ashford Retail Park access and egress upgrades to be addressed by the A2070/Barrey Rd scheme.

# 3.4 Case for Change – Rationale for the Scheme

- 3.4.1 The key rationale for the overall *Sustainable Interventions to Support Growth* programme is its role in supporting the planned growth in housing and employment, helping ensure that this take place in a sustainable manner. This is within the following context:
  - Housing and employment growth (and resultant activities such as education and shopping) will generate additional trips to the area;
  - Investment in the highway network is designed to cater for these additional trips, enabling the developments to take place;
  - The benefits of these investments can be 'locked in' if a proportion of the trips can be undertaken by sustainable modes, including public transport, walking and cycling;
  - This 'locking in' will ensure that growth can continue as planned and not become unsustainable through rising congestion;
  - It is crucial that growth occurs in an inclusive way, enabling those without cars to
    access jobs and services. Good quality public transport and cycle/ walking links are
    key to this, as can other sustainable transport interventions in the KSIP;
  - In order to achieve this, good public transport and safe, attractive and direct
    routes for walkers and cyclists are required. This will attract users who would
    normally travel by car, especially if traffic-free routes can be designed to provide
    competitive journey times. The safe routes to school will also improve the safety
    and independence of children in the area;



- The component schemes in this year's Programme demonstrate how the Sustainable Interventions to Support Growth programme supplements wider schemes funded by private developers, Section 106 developer funding and LGF funds to provide comprehensive, inclusive access to jobs, services and facilities;
- The 2018/19 component schemes highlight that by disadvantaging sustainable modes, congestion and road safety problems are exacerbated.
- 3.4.2 Although clearly the wider development schemes have been justified in their own right and can go ahead even without the additional schemes being promoted, additional benefits can be delivered; especially in terms of the efficiency of operation and the inclusiveness of the scheme.

### **Existing Situation**

Sloe Lane and surrounds (Thanet)

- 3.4.3 Sloe Lane is located in the growing Westwood area to the west of the Thanet conurbation. The Westwood area, based around the Westwood Cross shopping centre, includes further retail and employment (including Saga). In addition, as part of the Thanet local plan, around 2,500 houses will be delivered in the area. Whilst the existing road network has been developed, and further highways improvements are in the emerging transport strategy, it will be important to maximise mode shift to sustainable modes.
- 3.4.4 The western end of the Sloe Lane Cyclepath scheme on the A254 is located adjacent to Star Roundabout, just north of Westwood, which has current peak throughput of around 2,250 and an expected uplift of 25% over the local plan period. The eastern end meets the A255 near Dane Court roundabout, at the existing Toucan crossing, and on towards the residential areas on the outskirts of Broadstairs. The A255 has a two-way link flow on of around 1200-1300 vehicles in each of the peaks.
- 3.4.5 The scheme will provide approximately 0.75km of shared use path which forms an important missing link in the existing cycle network. The route links the schools, community services and residential areas around Dane Park Road and Northdown Park with the employment, education, retail provision around Westwood and with new development areas (Figure 3-1).



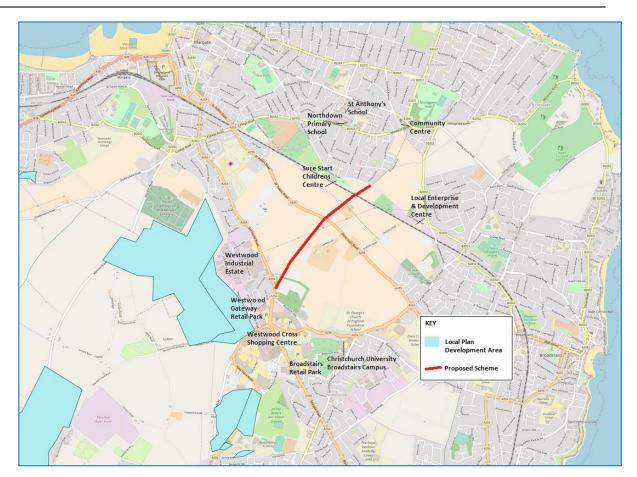


Figure 3-1 Sloe Lane Cyclepath Scheme

### A228 Holborough

- 3.4.6 The A228 is an important county road, connecting Strood (Medway) to the M2/M20 and beyond. Due to both connectivity and enabling development, it is part of the emerging Major Road Network (MRN) being embraced by DfT.
- 3.4.7 The A228 in the area of the scheme has an AADT of around 20,000 (DfT CP 38806). This traffic is increasing the severance between existing and new developments on the east, especially St Peter's Village (Trenport/HCA scheme of 1,000 homes), and the town of Snodland and the Holborough lakes development (1000 homes) on the west. Key local services in Snodland include primary schools, secondary school, community centre, retail provision and medical centre (Figure 3-2).
- 3.4.8 The evolving development urban footprint is forming a N-S ribbon of over a mile along the A228, and the key existing crossings of a roadbridge and footbridge are both located in the southern end of this stretch.



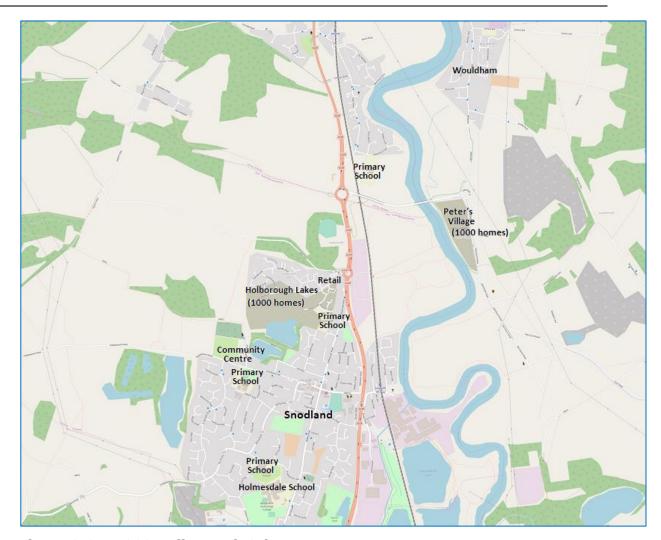


Figure 3-2: A228 Holborough Scheme

### A2070 / Barrey Road

- 3.4.9 The A2070 is part of the Strategic Road network. It is broadly the southern Ashford relief road, and has been an important enabler of the growth of Ashford as one of the four key national growth areas. It links the Southern coastal road with the M20 at J10. The emerging J10A proposal will further enable development off the A2070.
- 3.4.10 In addition to serving the strategic through-traffic, the A2070 serves a variety of development; with Barrey Road serving a retail and business park (Figure 3-3).
- 3.4.11 The exit of Barrey Road has recognised queues on both the weekday PM and Saturday.
- 3.4.12 Existing two-way link flows on the A2070 already exceed 3,000 vehicles in the peak hours; with significant increase expected with the growth agenda. This additional growth will be from the continuing growth of Ashford, which has had cycling provision as an important element since the 2002 Greater Ashford Development Framework (GADF).



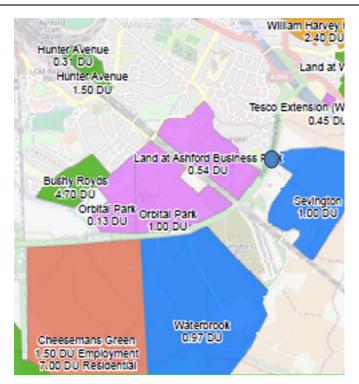


Figure 3-3: Development of A2070 and Scheme Location

# 3.5 Objectives

- 3.5.1 The overarching objective of the investment is to complement the objectives of the major schemes. The broad objectives for the 2018/19 KSIP scheme are generalised in Table 3-1. This year's intervention schemes are aimed at improving cycle facilities and have been dealt with collectively to summarise the objectives however, the precise objectives of the schemes may differ slightly but may include improving accessibility, road safety improvements, improved signage and improved walk/ cycle links.
- 3.5.2 For the 2018/19 schemes the priority changes with 'active health' becoming a higher priority.

# Objectives (primary and secondary combined to generalise across programme)

### 1 - Improve cycling and walking infrastructure/facilities

- Reduce congestion
- Improve connectivity to services, including train stations, town centres and tourist attractions
- Provide signing and improve quality of paths where required.

**Document Title** 2018/19 LGF Transport Business Case Report



### **Objectives**

### (primary and secondary combined to generalise across programme)

# 2 - Improve the health and wellbeing of residents

- Promote active transport (walking and cycling)
- Provide opportunities to link with long distance cycle routes for leisure users.

### 3 – Improve road safety

Reduce conflicts and potential for accidents.

### 4 – Improve access to education and other facilities

Provide direct and desirable links between facilities.

### 5 - Enhance the local environment

- Improve air quality by encouraging residents out of their cars
- Complement and enhance the wider scheme.
- 6 To deliver wider social and economic benefits (e.g. accessibility and social inclusion) for the community
- 7 To improve the general transport infrastructure, including arrangements for parking and signing for other road users to be aware

### **Table 3-1: Scheme Objectives**

3.5.3 It can be seen that the objectives accord well with the strategic aims of both the local authority and national policy.

### 3.6 **Measures of Success**

- 3.6.1 Successful delivery against the scheme objectives will be monitored as part of the post construction monitoring and evaluation.
- 3.6.2 It is envisaged that monitoring will include before and after conditions in relation to:
  - Number of school pupils cycling to/ from school;
  - Accident rates around cluster sites; and
  - Cycle counts on key routes.

#### 3.7 **Constraints**

3.7.1 The key constraint most likely to affect the delivery of the intervention schemes is land ownership.



- 3.7.2 In order to overcome this, the funding allocation proposed for the forward scheme identification as part of this KSIP, will seek early negotiations with land owners in order to assess the viability of such schemes.
- 3.7.3 The other constraints which may affect delivery of the schemes are funding allocations and scheme approvals. The Sloe Lane Cyclepath and A2070 Barrey Road Junction Improvements will both be supported by funding other than that granted by SELEP.
- 3.7.4 The Sloe Lane Cyclepath scheme has been designed and already has approval from Thanet JTB. The A228 Holborough Proposed Puffin Crossing is currently being designed and will require approval. The proposed A2070 Barrey Road Junction Improvements are under consultation with Highways England around timing and the delivery process.

# 3.8 Inter-dependencies

3.8.1 The schemes proposed as part of the 2018/19 KSIP will provide sustainable travel infrastructure to support larger schemes and the growth aspirations of the County. However, each scheme in itself is not dependent on any other schemes proceeding before it can go ahead and the schemes do not need to go ahead before another scheme can proceed.

### 3.9 Stakeholders

- 3.9.1 Stakeholders have been defined and analysed in relation to the wider schemes (Tables 3.2 3.5);
  - All stakeholders, categorised in terms of their interest in the scheme, how they will be engaged with and consulted through the design and delivery process; and
  - Further analysis of stakeholders benefitting from the scheme. These scheme
    beneficiaries have been mapped against the scheme objectives, enabling
    consultation to be targeted effectively and assisting in framing the Benefits
    Realisation Plan for the scheme.



Category	Detail
Beneficiary	Stakeholders who will receive some direct or indirect
	benefit from the scheme. For details see separate table.
Affected	Stakeholders who are directly affected by the scheme in
	terms of its construction or operation.
Interest	Stakeholders with some interest in the scheme though
	not affected directly by its construction or operation.
Statutory	Stakeholders with a statutory interest in the scheme, its
	construction, operation or wider impacts.
Funding	Stakeholders involved in the funding of the construction
	or operation of the scheme.

**Table 3-2: Stakeholder Categorisation** 

Category	Detail
Intensive consultation	Stakeholders who are directly affected by the scheme
	and whose agreement is required in order for the
	scheme to progress. Consultation throughout the design
	and implementation.
Consultation	Stakeholders who are affected by the scheme and can
	contribute to the success of its design, construction or
	operation. Consultation at key stages.
Information	Stakeholders with some interest in the scheme or its
	use. Information to be provided at appropriate stages.

**Table 3-3: Stakeholder Engagement Categories** 



Stakeholder	Categories	Engagement and Consultation	Comments
Scheme users	Beneficiary	Consultation	Through
		Information	established mechanisms.
Retailers and other	Beneficiary	Consultation	Focus on scheme
businesses affected	Affected	Information	design,
Public transport users	Affected	Consultation	construction and
		Information	operation
Bus & rail operators	Affected	Consultation	
Other road users	Beneficiary	Information	
	Affected		
Access and rights of way	Beneficiary	Consultation	
groups (including cycling)	Affected		
Disabled access groups	Interest	Consultation	
and individuals	Affected		
Landowners	Affected	Intensive consultation	Specific
Elected Members	Interest	Intensive consultation	consultation dependent on
			interest in
			relation to
			scheme design
Local authorities	Beneficiary	Intensive consultation	County, District &
	Statutory		Parish
NHS (& local authorities in	Beneficiary	Intensive consultation	All levels. May
relation to Public Health)	Statutory		involve funding



Stakeholder	Categories	Engagement and Consultation	Comments
Police and other	Affected	Consultation	Through
emergency services			established
			mechanisms
Environment Agency	Statutory	Intensive consultation	Specific
			consultation
Local Enterprise	Beneficiary	Information	Through LGF
Partnership	Funding		Business Cases &
			progress reports
Developers	Beneficiary	Consultation	Only as relevant
	Affected		to scheme
Residents adjoining	Beneficiary	Information	
scheme	Affected		
Wider business community	Beneficiary	Information	As part of wider
Wider community	Beneficiary	Information	LGF consultation
Local taxpayers	Beneficiary	Information	
Tourists and visitors	Beneficiary	Information	Through
			established
			channels

**Table 3-4: Stakeholder Matrix** 



Objectives	Main Benefits Criteria by Stakeholder
Objective 1	Users
Improve cycling	Financial benefits through less need to own or use a car
infrastructure/ facilities	Increase confidence to use facilities due to more formal facilities
in various Kent	Local Authorities, NHS and Local Enterprise Partnership
locations.	Locking in the decongestion benefits, including health-related, of sustainable transport users in these districts
	Improved attractiveness of the area for inward investment and job creation
	Improved attractiveness of the area for retail and housing
	Retailers and other businesses
	Locking in the decongestion benefits of sustainable transport investment
	Developers and Employers
	Ability to develop schemes without excessive planning conditions
	Ability to create employment and attract employees
Objective 2	Users
Improve the health and	Health benefits due to improved fitness
wellbeing of residents	Increased leisure facilities creating social opportunities
	Local Authorities, NHS and Local Enterprise Partnership
	Increased wellbeing of residents in the County
	Increased health of residents in the County puts less pressure on NHS
	services
	Employers
	Access to a healthier and fitter workforce increases productivity
Objective 3	Users and their families
Improve road safety	Personal safety and security for users of the route and their families
	Local authority & Local Enterprise Partnership
	Maintaining the attractiveness of the area for jobs and housing
Objective 4	Users
Improve access to	Improve access to employment education etc. for those without cars
education and other	Improve social inclusion for residents
facilities	Local Authority
	More skilled residents
	Employers
	Access to a skilled local work force



Objectives	Main Benefits Criteria by Stakeholder
Objective 5	Local residents and businesses
Enhance the local	Maintain the attractiveness of the area
environment around the	Preserving and improving the built environment
schemes	Local authority
	Meeting statutory duties
	Local Enterprise Partnership
	Maintain the attractiveness of the area for investment, jobs and housing
Objective 6	Local community
Deliver wider social and	•
economic benefits for	Improve attendance at groups and social activities enhancing community relationships
the community	relationships
Objective 7	Users
Improve the general	Improved journey times and health benefits
transport infrastructure	Motorised road users
	Clearer signage and more formal routes will alert drivers earlier that cyclists
	may be present

**Table 3-5: Stakeholder Benefits in relation to Scheme Objectives** 

# 3.10 Options Considered

3.10.1 The nature, scope and scale of this scheme do not justify the development of multiple options, though tactical design decisions will be made in response to local stakeholder feedback. Consequently, only two options have been considered.

### **Option 1: Do Nothing**

### Description

3.10.2 This option will leave the existing poor quality facilities in place.

### **Advantages**

There will be no expenditure on the facilities.

### **Disadvantages**

- There will be no improvement to facilities;
- As a result there will be no improvement non-motorised transport access in all locations, road safety or encouragement for the local communities to take up more walking and cycling.



### **Conclusion**

3.10.3 The 'Do Nothing' option is rejected.

Option: Not carried forward but used as 'baseline' for appraisal

### Option 2: Upgrade of existing facilities/ provision of new cycle infrastructure

### **Description**

This option will upgrade/ provide the cycle infrastructure as outlined in the Chapter 2 of this document.

### **Advantages**

- The proposed improvements to cycle facilities will be achieved;
- Mode choice will be improved by providing high quality cycle links and infrastructure between residential areas and services;
- Road safety will be improved;
- The local environment will be improved.

## **Disadvantages**

Expenditure would be approximately £553k (as part of a Sustainable Interventions Programme of £3.0m).

### **Conclusion**

3.10.5 Option 2 is the preferred option in terms of delivery of overall goals, management of risks and the long-term maintainability of the scheme.

### **Option: Preferred Option**



### 4 Economic Case

# 4.1 General KCC Approach to Scheme Economic Case

### General Overview of Approach to Economic Case

- 4.1.2 The economic case is one of five strands of evidence required to support the scheme transport business case. KCC's general approach to the economic case has been determined by the need for it to be proportionate to the scale, scope and cost of the proposed scheme and the preparation time available. This approach is fully consistent with Department for Transport advice to scheme promoters (KCC) and adjudicators (SELEP). This advice recurs in the following DfT guidelines:
  - Transport Analysis Guidance (WebTAG) (The Proportionate Update Process January 2014);
  - Value for Money advice note, December 2013 (Sections 1.4, 1.17, 5.3);
  - The Transport Business Cases, January 2013 (Sections 1.4, 2.7, 6.2);
  - LEP Assurance Framework, December 2014 (Sections 5.6, 5.7, Annex A); and
  - HM Treasury The Green Book, July 2011 (Appraisal and Evaluation in Central Government).
- 4.1.3 However, none of the above guidance specifies the parameters of what constitutes a proportionate approach to appraisal. Therefore, KCC has applied best judgement to decide how much rigour there should be in the scheme economic case.

### Qualitative Economic Appraisal

- 4.1.4 Generally, for a scheme with relatively large cost (>£5m), the economic appraisal has been substantiated with quantified outcomes. Conversely for schemes with relatively small cost (<£5m), mainly qualitative evidence has been assembled.
- 4.1.5 In line with the proportionate approach, KCC has prepared qualitative evidence to support the scheme economic case. The component schemes all have a very low cost (<£300k) and as such it was considered that it would be disproportionate to undertake a detailed quantitative appraisal for each.



- 4.1.6 Instead the component schemes will be considered collectively, due to their similar nature, in terms of all aspects of scheme performance and likely impacts, in line with the TAG criteria outlined in the Appraisal Summary Table (AST), broadly:
  - Economic prosperity and efficiency
    - User travel costs, congestion, reliability, regeneration and wider economy;
  - Environment
    - Noise, air quality, greenhouse gases, landscape, townscape, heritage, biodiversity and water;
  - Social well-being
    - Accidents, physical activity, journey quality, value for non-users, affordable travel, security, access to opportunities/door-to-door options and severance;
  - Public accounts
    - Cost to transport budget, indirect tax receipts and value for money (VfM).

#### Qualitative Evidence for Economic Case

- 4.1.7 The economic outcomes from the scheme have been assessed by aligning with a qualitative scale. This appraisal method for the economic case has largely followed the steps outlined in the DfT 'Value for Money' approach. The qualitative method is considered to be appropriate for schemes of modest cost and scope, which do not merit an elaborate, quantified economic case.
- 4.1.8 A sequence of six steps has been traced, to attribute a qualitative scale to the scheme's economic impacts, as follows:
  - Define an initial BCR (for usually monetised impacts); and
  - Work out an adjustment to the BCR (for sometimes monetised impacts);
  - Both against a 5-point scale (poor/low/medium/high/very high);
  - Undertake a qualitative assessment (for rarely monetised impacts), against a 7point scale (slightly/moderately/largely beneficial, neutral, slightly/moderately/
    largely adverse);
  - Combine items above, to give an initial VfM, against a 4-point scale (low/medium/high/very high);
  - Make a risk assessment, to derive a further adjustment to the initial VfM, using the 7-point scale; and
  - Finalise the overall VfM, by adjusting the initial VfM for risk, using the 4-point scale.



4.1.9 Qualitative evidence used to support the economic case is based around applying an order of magnitude to a likely scheme outcome, rather than by calculating a precise, quantified, impact value.

# 4.2 Proportionality Assessment

- 4.2.1 HM Treasury's Green Book states that all new proposals should be subject to comprehensive but proportionate assessment, wherever it is practicable, so as best to promote public interest.
- 4.2.2 Table 4-1 discusses TAG Appraisal Summary Table (AST) impacts and outlines the key proportionality assumptions made through the development of the KSIP package of measures and the appraisal process. The assumption table provides supplementary and supporting information to the proportionality assessment.

Impact	2018/19 KSIP Component Schemes
Economy: Business users and transport providers	Minor journey time benefits are anticipated by encouraging more cycling and walking trips and therefore modal shift away from the car. Due to the relatively low cost of the component schemes the journey time benefits have been assumed. A qualitative score has been applied using professional judgement.
Economy: Reliability impact on business users	Minor journey time benefits are anticipated by encouraging more cycling and walking trips and therefore modal shift away from the car. Due to the relatively low cost of the component schemes the journey time benefits have been assumed. A qualitative score has been applied using professional judgement.
Economy: Regeneration	Negligible regeneration impacts are anticipated across Kent as a result of KSIP; however, it is not judged appropriate to complete the assessment (TAG Unit A2.2 January 2014) for such a low cost scheme which is likely to have very diffused regeneration benefits. A qualitative score has been applied using professional judgement.
Economy: Wider impacts	Positive wider impacts would be expected to accrue across Kent, but the impacts are expected to be dispersed rather than in measurable concentrations in a few locations. A qualitative score has been applied using professional judgement.
Environmental: Noise	The proposed scheme is expected to result in minimal impact in terms of noise and vibration, therefore a quantitative assessment has not been carried out (TAG Unit A3 November 2014). A qualitative score has been applied using professional judgement.



Impact	2018/19 KSIP Component Schemes
Environmental: Air quality and Greenhouse gases	The proposed scheme would be expected to contribute to reduced congestion in urban areas resulting in fewer vehicles idling at congestion and pollution 'hotspots'. However given the scope of the scheme it is inappropriate to perform detailed air quality testing (TAG Unit A3 November 2014). A qualitative score has been applied using professional judgement.
Environmental: Landscape	Any change to landscape value is expected to be small and limited to the corridors and junctions covered in the scheme. A qualitative score has been applied using professional judgement.
Environmental: Townscape	Any change to townscape is expected to be small and limited to the corridors and junctions covered in the scheme. A qualitative score has been applied using professional judgement.
Environmental: Historic environment	No change in historic environment is expected as a result of the schemes. A qualitative score has been applied using professional judgement
Environmental: Biodiversity	Ecological impacts are unlikely with the introduction of any of the component parts of the programme. Works could potentially impact on protected species and habitats where vegetation clearance is required or where works are within or close to a sensitive site. A qualitative score has been applied using professional judgement.
Environmental: Water environment	Any impact on the water environment is anticipated to be minimal. A qualitative score has been applied using professional judgement.
Social: Commuting and other users	Due to the relatively low cost of the component schemes the journey time benefits have been assumed. A qualitative score has been applied using professional judgement.
Social: Reliability impact on Commuting and Other users	The proposed scheme would be expected to contribute to reduced congestion in urban areas resulting in improved reliability for commuters and other users. A qualitative score has been applied using professional judgement.
Social: Physical activity	The proposed schemes are expected to result in significantly positive impact in terms of physical activity; however, a quantitative assessment (TAG Unit A4.1 November 2014) has not been carried out, given the low cost of the scheme. A qualitative score has been applied using professional judgement.
Social: Journey quality	Due to the low cost of the scheme and the diffused locations of the improvements, it is not deemed appropriate to undertake a full assessment (i.e. completing TAG worksheets). A qualitative score has been applied using professional judgement.



Impact	2018/19 KSIP Component Schemes
Social: Accidents	All of the proposed schemes are likely to improve safety for users and reduce accident rates. A qualitative score has been applied using professional judgement.
Social: Security	Due to the low cost of the scheme and the sparing distribution of impacts, it is not deemed appropriate to undertake a full assessment (i.e. completing TAG worksheets). A qualitative score has been applied using professional judgement.
Social: Access to services	Minor improvements in access to a number of services are expected. The schemes will deliver increased accessibility to retail, education and leisure. A qualitative score has been applied using professional judgement.
Social: Affordability	There is not expected to be any impact on personal affordability with the scheme. Due to the low cost and small impact of the scheme it is not deemed appropriate to undertake a full assessment (i.e. completing TAG worksheets). A qualitative score has been applied using professional judgement.
Social: Severance	Some improvement in terms of severance is expected from the schemes. Due to the low cost it is not deemed appropriate to undertake a full assessment (i.e. completing TAG worksheets). A qualitative score has been applied using professional judgement.
Social: Option and non- use values	The scheme being appraised does not include any measures that will substantially change the availability of transport services within the study area. A qualitative score has been applied in line with TAG Unit A4.1 (November 2014).

**Table 4-1: Proportionality Assumptions** 

#### 4.3 BCR

4.3.1 Due to the low cost of the component schemes a quantified appraisal has not been undertaken and therefore no BCR has been calculated for the KSIP scheme for this financial year.

# 4.4 Qualitative Assessment

- 4.4.1 The assessments of impacts made above have been input into the Appraisal Summary Table (AST) shown as **Table 4-2** provided overleaf.
- 4.4.2 The qualitative assessment indicates that the proposed schemes making up the KSIP programme for 2018/19 would have an overall beneficial impact. In particular, the social impacts of the scheme are where most benefits are considered to be gained by the proposed schemes.

# **Project Name** Sustainable Interventions Supporting Growth





		Impacts	Summary of key impacts	Qualitative Assessment
	omy	Business users & transport providers	Minor journey time benefits are anticipated by encouraging more cycling trips and therefore modal shift away from the car.	Slightly beneficial
	Economy	Reliability impact on Business users	Minor journey time benefits are anticipated by encouraging more cycling trips and therefore modal shift away from the car.	Slightly beneficial
•		Regeneration	Negligible regeneration impacts are anticipated across Kent as a result of KSIP	Neutral
		Noise	The proposed schemes are expected to result in minimal impact in terms of noise and vibration.	Neutral
		Air Quality	The proposed schemes are expected to result in a positive impact in terms of air quality by encouraging increased cycling trips and modal shift away from private car.	Slightly beneficial
	Environmental	Greenhouse gases	The proposed schemes are expected to result in a positive impact in terms of a reduction in hydrocarbon, carbon monoxide and nitrous oxides by encouraging increased cycling trips and modal shift away from private car.	Slightly beneficial
	Ĕ	Landscape	Any change to landscape value is expected to be negligible.	Neutral
-	VIIO	Townscape	No change in townscape is expected as a result of the schemes.	Neutral
ú	E	Historic Environment	No change in historic environment is expected as a result of schemes.	Neutral
		Biodiversity	Ecological impacts are unlikely with the introduction of any of the component parts of the programme. Works could potentially impact on protected species and habitats where vegetation clearance is required or where works are within or close to a sensitive site.	Neutral
		Water Environment	Minimal impact on water environment anticipated.	Neutral
		Commuting and Other users	The proposed scheme would be expected to contribute to reduced congestion in urban areas resulting in improved conditions for commuters and other users.	Slightly beneficial
	-	Reliability impact on Commuting and Other users	The proposed scheme would be expected to contribute to reduced congestion in urban areas resulting in improved reliability for commuters and other users.	Slightly beneficial
		Physical activity	The proposed schemes are expected to result in a significantly positive impact in terms of physical activity by encouraging increased cycling trips.	Largely beneficial
	Social	Journey quality	The proposed schemes are expected to result in a significantly positive impact in terms of journey quality by providing direct, traffic-free cycle routes through countryside or coastal environments.	Largely beneficial
C	ň	Accidents	The Holborough scheme is aimed at improving safety.	Largely beneficial
		Security	There is not expected to be any impact on security.	Neutral
		Access to services	Minor improvements in access to a number of services are expected as the cycle schemes will deliver increased accessibility to retail, education and leisure.	Slightly beneficial
		Affordability	There is not expected to be any impact on personal affordability with the scheme.	Neutral
		Severance	The Holborough scheme in particular is anticipated to reduce severance issues.	Slightly beneficial

**Project Name** Sustainable Interventions Supporting Growth **Document Title** 2018/19 LGF Transport Business Case Report



	Impacts	Summary of key impacts	Qualitative Assessment
	Option and non- use values	The scheme being appraised does not include any measures that will substantially change the availability of transport services within the study area.	Neutral
olic	Cost to Broad Transport Budget	Capital funds from LGF have been assigned to each scheme within the project, and then adjusted for inflation (from 2010 prices) and for risk.	Slightly beneficial
Public Account	Indirect Tax Revenues	Slight reduction in fuel tax due to reduction in car trips (TAG Unit A5.4)	Slightly adverse

**Table 4-2: Appraisal Summary Table** 



# 4.5 Benchmarking

- 4.5.1 In order to provide an indication of the value for money of some of the component parts of KSIP for 2018/19, it has been considered appropriate to benchmark the proposed cycle improvements against a similar LGF scheme in Kent. The Kent Sustainable Access to Education and Employment scheme (also known as 'ROWIP') proposed to deliver a number of cycle route improvements around the County.
- 4.5.2 The approved business case for the ROWIP scheme calculated an overall scheme BCR of 9.04 representing very high value for money (VfM). The appraisal of these schemes was based upon Mortality Benefits calculated using the World Health Organisation's HEAT tool, based on projected usage of the cycle routes (TAG Unit A4.1.).
- 4.5.3 Although the proposed KSIP schemes may not deliver the same increase in users as the component schemes within ROWIP, the component scheme costs are relatively similar and very high BCR for ROWIP indicates that the KSIP schemes are likely to represent high value for money.

# 4.6 Value for Money Statement

- 4.6.1 Due to the disproportionate work in undertaking a quantified appraisal of the proposed component schemes in the 2018/19 KSIP, no BCR has been calculated.
- 4.6.2 A qualitative assessment of the schemes indicates that the proposals would have a beneficial impact, particularly in terms of social impacts. In addition, a benchmarking exercise of the proposed Sloe Lane cycle route upgrade against a similar LGF scheme indicates that this component would represent high value for money.
- 4.6.3 On the basis of the above and the relatively low cost of the scheme programme for 2018/19 it is considered that the combined proposals are likely to represent high value for money.



# **5** Financial Case

#### 5.1 Introduction

- 5.1.1 This chapter presents the Financial Case for the KSIP scheme. It concentrates on the affordability of the proposal, its funding arrangements and technical accounting issues. The total outturn costs and expenditure profile are presented, along with an assessment of the impact of the proposed deal on the Department's budgets and accounts.
- 5.1.2 Only the costs which will be incurred subsequent to a successful funding bid have been considered. 'Sunk' costs, which represent expenditure incurred prior to funding approval and which cannot be retrieved, have not been included.

# **5.2** Capital Cost Components at 2016 Prices

5.2.1 The capital required to fund the project is £3.0m for the period 2015 to 2021. With £0.143m spent in 2015/16, £0.406m spent in 2016/17, and an estimated £0.493m spent in 2017/18, giving a total spend of £1.042m for the first three financial years. The anticipated spend for 2018/19 will be £0.500m. Table 5-1 shows the scheme capital costs as estimated in 2017 prices.

Cost Category	£
Sloe Lane (contribution)	200,000
A228 Holborough	120,000
A2070 Barrey Road (contribution)	150,000
Forward Design	30,000
Total	500,000

**Table 5-1: Components of Investment Cost** 



#### 5.3 **Inflation to 2017 Prices**

5.3.1

Cost Category	£
Sloe Lane	200,980
A228 Holborough	120,588
A2070 Barrey Road	150,735
Forward Design	30,147
Total	502,450

5.3.2 Table 5-2 provides a base cost estimate of the investment which incorporates real cost increases. The average Consumer Price Index forecasts for 2017 is 2.3%<sup>1</sup>, while construction costs are forecast to increase by 2.8%<sup>2</sup> in the south east for the same period. Therefore the base investment costs, including real cost increases have been calculated as follows:

$$cost = 500,000 \times 1.028/1.023$$

Cost Category	£
Sloe Lane	200,980
A228 Holborough	120,588
A2070 Barrey Road	150,735
Forward Design	30,147
Total	502,450

**Table 5-2: Base Scheme Costs (2018 prices)** 

#### 5.4 **Quantitative Risk Assessment**

5.4.1 A 10% risk contingency has been applied in line with best practice for work of this nature.

#### **Final Scheme Costs** 5.5

5.5.1 Table 5-3 below shows the final scheme costs for the 2018/19 funding bid, including risk and inflation but excluding optimism bias and indirect taxation.

<sup>&</sup>lt;sup>1</sup> Forecasts for the UK economy: a comparison of independent forecasts; No. 366, November 2017.

<sup>&</sup>lt;sup>2</sup> Currie Brown tender price inflation by region, Q1 2017





Cost Type	Cost (£)
Scheme Cost	500,000
Inflation	2,450
Risk Allowance	50,245
Total	552,695

**Table 5-3: Summary of Final Scheme Costs (2018 prices)** 

#### 5.6 **Spend Profile**

5.6.1 An estimated outturn spend profile for the KSIP is shown in Table 5-4, split by financial year.

<b>Estimated Spend</b>	Total	15/16	16/17	17/18	18/19	19/20	20/21
Total Costs (£m)	3.000	0.143	0.406	0.493	0.553	0.703	0.702

**Table 5-4: Outturn Spend Profile** 

#### 5.7 **Whole Life Costs**

5.7.1 It is not anticipated that the component schemes will generate any additional wholelife costs. The nature and use of the proposed component schemes are highly likely to result in minimal maintenance requirements going forward. Therefore, no additional whole life costs should be ascribed.

#### 5.8 **Section 151 Officer Sign Off**

5.8.1 A signed letter by KCC's Section 151 officer providing appropriate assurances is contained in Error! Reference source not found...

#### 5.9 **Funding Assumptions**

5.9.1 The total remaining project cost is estimated at approx. £1.405 million which will be fully LEP funded which will be granted dependent on the business case.



### 6 Commercial Case

# **6.1** Scheme Procurement Strategy

Procurement Options

6.1.1 KCC have identified two procurements options for the delivery of their LEP funded schemes. The alternative options are:

#### Full OJEU Tender

- 6.1.2 This option is required for schemes with an estimated value of over £4,322,012.
- 6.1.3 KCC will then need to opt for an 'open' tender, where anyone may submit a tender, or a 'restricted' tender, where a Pre-Qualification is used to whittle down the open market to a pre-determined number of tenderers. This process takes approximately one month and the first part is a 47 day minimum period for KCC to public contract notice on the OJEU website.
- 6.1.4 The minimum tender period is 6 weeks but could be longer for larger schemes. Once the tenders are received they must be assessed and a preferred supplier identified. There is a mandatory 10 day 'standstill' period, during which unsuccessful tenderers may challenge the intention to award to the preferred contactor.
  - Delivery through existing Amey Highways Term Maintenance Contract (HTMC)
- 6.1.5 This option is strictly not procurement as the HTMC contract is an existing contract. The HTMC is based on a Schedule of Rates agreed at the inception of the contract. The price for each individual scheme is determined by identifying the quantities of each required item into a Bill of Quantities. Amey may price 'star' items if no rate already exists for the required item. If the scope of a specific scheme is different from the item coverage within the HTMC contract a new rate can be negotiated.
  - Preferred Procurement Option
- 6.1.6 The preferred procurement route for schemes within the KSIP is through the existing Amey Highways Term Maintenance Contract (HTMC).
- 6.1.7 This option has been selected as the value of the scheme is less than the OJEU scheme value threshold. The Amey HTMC has already delivered the KSIP intervention schemes in the 2015/16 and 2016/17 financial years and provides similar interventions in the

**Document Title** 2018/19 LGF Transport Business Case Report



form of construction and maintenance on the Kent highways network.

#### 6.2 **Potential for Risk Transfer**

- 6.2.1 It is expected that many of the design risks will only be able to be resolved through rigorous design and review processes, once the design options are clear and the scope of land acquisition, planning requirements, environmental requirements and statutory services issues are fully identified, the primary risks will be related to construction. There is potential for transferring these risks through the construction procurement process. This will be explored further as the scheme progresses.
- 6.2.2 KCC will be having early contractor involvement with its term contractor Amey Highways for the Slow Lane cycleway and A228 Holborough puffin crossing which will be designed in house using existing KCC design resources. The early contractor involvement will help identify risks and allocate them appropriately.
- 6.2.3 The Barrey Road cycle facility will be a contribution to Highways England as they have a project at the junction of Barrey Road with the A2070 and will be progressing cycle facilities through their project.



# **7** Management Case

#### 7.1 Introduction

- 7.1.1 The management case assesses the deliverability of the project, testing project planning, governance structure, risk management, communications and stakeholder management, benefits realisation and assurance.
- 7.1.2 It sets out a plan to ensure that the benefits set out in the economic case are realised and includes measures to assess and evaluate this.

# 7.2 Project Plan

7.2.1 The project timetable will run on an annual cycle, with selection of schemes for the following year being undertaken using an established scoring system mechanism to consider deliverability and outcomes in January 2018 as set out in Table 7-1.

Task Name	Duration		2018/19						2019/20										
KSIP Projects 18/19		Nov	Dec	lan	Eah	Mar	Anril	May	lune	luly	Λιισ	Sept	Oct	Nov	Dac	lan	Eoh	Mar	19/20 onwards
		1404	DCC	Juli	ren	IVIGI	Арпп	iviay	Julie	July	Aug	эсрі	Oct	1404	Dec	Jan	reb	IVIGI	Onwaras
	4 wks																		
Allocate funds to 2018/19	0 days																		
Agree Funding with LEP	o days																		
Detailed design & consultation																			
(2018/19 Schemes)	20 wks																		
Statutory Processes	20 wks																		
Procurement	4 wks																		
Baseline Study	4 wks																		
Delivery of schemes	28 wks																		
Completion	0 days																		
Monitoring & reporting on																			
performance	52 wks																		

**Table 7-1: Project Plan** 

# 7.3 Governance, Organisation Structure, Roles and Assurance

- 7.3.1 KCC have set up a clear and robust structure to provide accountability and an effectual decision making process for the management of the LEP funded schemes. The KSIP scheme has a designated Project Sponsor (Jamie Watson) who is an appropriately trained and experienced member of KCC staff.
- 7.3.2 Table 7-2 overleaf provides an outline of the overall governance structure implemented to manage the delivery of each scheme.



High level Agenda	Frequency						
		Attendees	Format	Scope	Agenda Items	Key Deliverables/Feedback	Templates
Planning Design struction Post Scheme Monitoring	Every two months - Can be called in emergency if required	Chair: TR MB/BC/RW/KS/CH/MG Supported by PB attendees as required	Face to face meeting	To discuss programme (i.e. high level programme Financial reporting communicatio/Stakeholder Engagement discuss and resolve issues. lssues/Risk/Change Decisions		Minutes of Meeting Action List/Decision Log Output distributed to all attendees + Programme Board Attendees where appropriate	Agenda Minutes Decision list
Decisions Needed	Every two months	LB	Report	To record progress/outstanding actions/issues that require a decision made by the board		Action list ready for the Sponsoring Group	Progress Repo
				·			
Planning Design struction Post Scheme Monitoring	Bi- Monthly	<b>Chair: LB</b> LB/KCC PMs/ External Suppliers	Face to face meeting	To discuss progress/preview next steps and discuss and resolve issues. Escalate issues/decisions required to the Sponsoring Group	Programme financial reporting Communicatio/Stakeholder Engagement Issues/Risk/Change	Minutes of Meeting Action List Output distributed to all attendees + Steering Group attendees where appropriate	Agenda Minutes
lentify key points for Programme Board Meeting	Monthly	LB	Report	To collate and streamline all reports highlighting areas of interest for the Programme Board meeting.		Used for Programme Board Meeting. Highlight report shared with PB attendees.	Highlight Repo
Progress Update	as required	Team/KCC	Face to face meeting	Individual meetings per project (including each stage of the LEP process to discuss progress in detail).	Project financial reporting	MS Programme Update Progress update in template for each project e.g Risk Register/ Issues Log	Agenda Minutes Progress Repo
sst Sco	Post cheme Monitoring  Decisions Needed  Planning Design truction Post cheme Monitoring  entify key points for Programme Board Meeting	truction Post emergency if required  Decisions Needed Every two months  Planning Design truction Post cheme Monitoring  Postify key points for Programme Board Meeting  Progress Update Monthly/Fortnightly as required	truction Post cheme Monitoring Post required Supported by PB attendees as required  Planning Design truction Post cheme Monitoring Bi- Monthly Chair: LB LB/KCC PMs/External Suppliers  Programme Board Meeting Monthly LB  Monthly/Fortnightly  Chair: KCC PMs All input staff - Project	truction Post cheme Monitoring Post required Supported by PB attendees as required Particular Post scheme Monitoring Post required Planning Design truction Post cheme Monitoring Post cheme Monitorin	emergency if required  Supported by PB attendees as required  Face to face meeting progress/preview next steps and discuss and resolve issues.  To record progress/outstanding actions/issues that require a decision made by the board  Planning Design truction Post cheme Monitoring  Bi- Monthly  Chair: LB LB/KCC PMs/External Suppliers  Chair: LB LB/KCC PMs/External Suppliers  Programme Board Meeting  Monthly  LB  Report  To discuss progress/preview next steps and discuss and resolve issues. Escalate issues/decisions required to the Sponsoring Group  To discuss progress/preview next steps and discuss and resolve issues. Escalate issues/decisions required to the Sponsoring Group  To collate and streamline all reports highlighting areas of interest for the Programme Board meeting.  Chair: KCC PMs All input staff - Project Team/KCC  Team/KCC  Face to face meeting Individual meetings per project (including each stage of the LEP process to discuss progress in detail)	emergency if required supported by PB attendees as required support support supports support supports support supports support supports s	emergency if required Supported by PB attendees as required Supported by PB attendees as required sheme Monitoring Post cheme Monitoring Pecisions Needed Every two months  Ev

**Table 7-2:KCC Project Governance Structure** 

Corporate Director Growth, Environment and Transport

Head of Financial Management Strategic and Corporate Services.

Major Capital Programme Manager for Growth, Environment and Transport

Local Growth Fund Programme Manager for Growth, Environment and Transport

Head of Transportation for Growth, Environment and Transport

Director of Highways, Transport and Waste Director of Environment, Planning and Enforcement,

BC

RW

KS

CH

TR

MG

LB

Barbara Cooper

Roger Wilkin

Katie Stewart

Cath Head

Tim Read

Mary Gillett

Lee Burchill

Doc. Ref.:CO04300618/005 Rev. 01 - 47 - Issued: January 2018



7.3.3 A detailed breakdown of the meetings (along with the attendees, scope and output of each) which make up the established governance proves is set out below.

### Project Steering Group (PSG) Meetings

7.3.4 PSG meetings are held fortnightly to discuss progress on the scheme and will be chaired by Jamie Watson. Progress is discussed in technical detail raising any issues or concerns for all to action. A progress report, minutes of meeting and an update on programme dates are provided ahead of the Programme Board (PB) meeting for collation and production of the Highlight Report.

### **Highlight Report**

7.3.5 The Progress Reports sent by the Project Sponsor comprise of the following updates; general progress, project finances, issues, risks and governance meeting dates. The Highlight Report identifies any areas of concern or where decisions are required by the PB meeting or higher to the KCC LEP Programme Manager. An agreed version of the Highlight Report is issued to the PB meeting attendees during the meeting.

# Programme Board (PB) Meeting

7.3.6 The PB meeting is held monthly and is chaired by the KCC LEP Programme Manager. Attendees include representatives from all three stages of the schemes (i.e. KCC LEP Management, KCC Sponsors, KCC PMs). This meeting discusses project progress to date, drilling into detail if there is an issue or action (as identified in the PSG meeting), financial progress, next steps and actions. Outputs of this meeting are the Highlight Report and the minutes of the meeting.

#### **Escalation Report**

7.3.7 A list of actions and decisions that the PB meeting was unable to resolve is prepared ready for the Sponsoring Group (SG) meeting to discuss and ultimately resolve.

### Sponsoring Group (SG) Meeting

7.3.8 The SG meeting is held monthly and chaired by Tim Read (KCC Head of Transportation). Attendees are Barbara Cooper (Corporate Director), Roger Wilkin (Director of Highways, Transportation and Waste) and Mary Gillett (KCC Major Capital Programme Manager). This meeting discusses high-level programme progress to date, financial progress, next steps and closes out any actions from the escalation report.
Output is sent to Mary Gillett for distribution. Technical advisors are invited if necessary



to expand upon an issue. All actions from the start of this meeting cycle are to be closed out by the SG when they meet (i.e. no actions roll over to subsequent meetings).

### **Project Roles and Responsibilities**

Role	Name	
KCC SELEP Schemes Delivery Manager	Lee Burchill	
Project Sponsor	Jamie Watson	
Amey HTMC Contact	Martin Addison	

# 7.4 Suitability and Availability of Resources

- 7.4.1 The proposed component schemes are intended to be delivered using a collaborative approach between KCC staff and their appointed consultants. KCC have identified appropriately trained and experienced staff that will be responsible for the delivery of the scheme. The identified staff fulfilling the Project Sponsor and Project Manager roles for the scheme has been ring-fenced to support the scheme throughout its duration and will have more junior staff available to support them.
- 7.4.2 KCC will also utilise dedicated Amey resource through the existing HTMC contract to undertake the construction of the scheme and also to provide early contractor involvement (ECI), where appropriate, to the design process to ensure best value.

### 7.5 Evidence of Previously Successful Scheme Delivery

7.5.1 KCC have a successful track record of delivering both major and minor transport schemes within the county.

### Minor KCC Transport Schemes

7.5.2 A recent minor transport scheme to be completed in Kent is the Maidstone Bridges Gyratory. It was completed in December 2016 and was designed to remove the need for the northbound traffic to cross the two town bridges and therefore reducing localised congestion in the area. This in turn will support the growth aspirations in the emerging Maidstone Local Plan. The scheme was successfully delivered within budget and ahead of schedule. The scheme was delivered through Amey HTMC. The intended scheme outcomes will soon be monitored but the intended benefits of the scheme are anticipated to be realised.



Issued: January 2018

7.5.3 The Tonbridge Town Centre regeneration scheme, completed in May 2016, aimed to provide a more attractive environment for pedestrians through the lower High Street of Tonbridge. The scheme was delivered under budget and to programme. The scheme was delivered through Amey HTMC and the intended scheme outcomes will soon be monitored.

### Major KCC Transport Schemes

- 7.5.4 Two recent major transport schemes delivered by KCC are the East Kent Access Phase 2 (EKA2) and Sittingbourne Northern Relief Road schemes (SNRR).
- 7.5.5 The EKA2 scheme, completed in May 2012, was designed to support economic development, job creation and social regeneration, improving access with high quality connections between the urban centres, transport hubs and development sites in East Kent. The overall objectives of the scheme were to unlock the development potential of the area, attract inward investment and maximise job opportunities for local people. The extent of the scheme is shown in Figure 7-1 overleaf.

The scheme was successfully delivered within budget and ahead of programme through the adoption of a robust management approach similar to that set out above to deliver the Sustainable Interventions scheme. The total value of the scheme was £87.0m of which £81.25m was funded by Central Government. The scheme was procured through a full OJEU tender process.

The intended scheme outcomes are currently being monitored but the intended benefits of the scheme are anticipated to be realised.



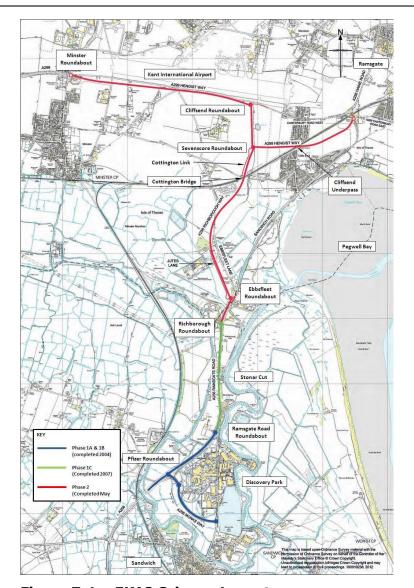


Figure 7-1: EKA2 Scheme Layout

- 7.5.6 The SNRR scheme, completed in December 2011, was designed to remove the severance caused by Milton Creek and give direct access to the A249 trunk road for existing and new development areas, thereby relieving Sittingbourne town centre.
- 7.5.7 The delivered scheme is shown in Figure 7-2:



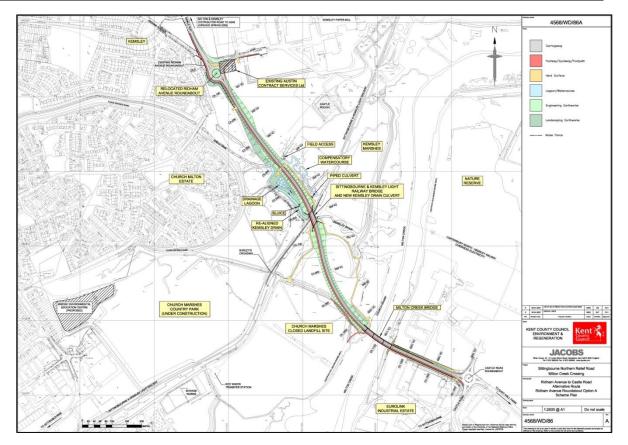


Figure 7-2: SNRR Scheme Layout

The project is an excellent example of multi agencies working towards a common aim. The scheme was funded by the Homes & Communities Agency in its Kent Thameside regeneration role, by the Department of Transport in its support of local major schemes and by private sector S106 contributions. The scheme was delivered under budget and to programme. The scheme was procured through a full OJEU tender process.

Both the EKA2 and SNRR schemes have since been awarded regional Institute of Civil Engineers (ICE) Excellence Awards.

# 7.6 Risk Management

- 7.6.1 Project risk is managed as an on-going process as part of the scheme governance structure, as set out in sections 7.3 of this report.
- 7.6.2 The KSIP risk register is maintained and updated at each of the two-weekly Project Steering Group Meetings. Responsibility for the risk register being maintained is held by the KCC PM and is reported as part of the monthly Progress Reports. An example scheme risk register is shown in Table 7-3.





**Table 7-3: Example Risk Register** 

- 7.6.3 Any high residual impact risks are then identified on the highlight report for discussion at the Programme Board (PB) meeting. Required mitigation measures are discussed and agreed at the PB meeting. Required mitigation measures are discussed at the PB meeting and actioned by the KCC PM as appropriate.
- 7.6.4 The risk management process for the C-ITS programme will be based on the PRINCE2 project management methodology to ensure that risks are identified, assessed in terms of their likely impact and probability, and can therefore be appropriately prioritised. In this way the risks with the greatest impact and the greatest probability of occurring can be addressed first, and risks with lower probability of occurrence and lower loss can be handled in descending order. Identifying ways of tackling these risks is an integral part of this process, which also considers the opportunity cost of the proposed mitigating actions, to ensure that the chosen action taken is both appropriate and cost effective.
- 7.6.5 This process follows widely recognized good principles for effective Risk Management, ensuring that risk will be an integral part of the organisational processes and part of the decision making process. It will explicitly address uncertainty and assumptions in a systematic and structured way based on the best available information at the time. It will be able to be tailored to suit the situation and need, be transparent, inclusive dynamic, iterative and responsive to change. The risk management strategy will be capable of continual improvement and enhancement, and can be continually or periodically re-assessed.
- 7.6.6 In line with these principles, initial risks have been identified during the inception and development stages of the programme as listed in Table 7-5. These risks will be continually reviewed and re-assessed going forward as part of the defined management processes for the programme. New risks will be raised and discussed as they are identified, assessed, tracked and acted upon as agreed by the programme coordinator and Steering Group as appropriate.



# 7.7 Benefit Realisation Plan and Monitoring

- 7.7.1 Tracking of the scheme benefits will be a key element in understanding the success of a specific intervention. The realisation of benefits is intrinsically linked to the Monitoring and Evaluation plan (Table 7-4).
- 7.7.2 The scheme objectives set out in Section 3.5 have been used to develop the desired outputs and outcomes for the scheme. The desired outputs are the actual benefits that are expected to be derived from the scheme and are directly linked to the original set of objectives. The definition of outputs and outcomes are:
  - Outputs tangible effects that are funded and produced directly as a result of the scheme; and
  - Outcomes final impacts brought about by the scheme in the short and medium/long term.

Measures	Monitoring	Benefits Realisation	Comments
Delivery on time	Through contract management	Through contract management	
Delivery on budget	Through contract management	Through contract management	
Delivery of safe, attractive facilities	User satisfaction surveys		Delivery will be enhanced through use of existing partnership working
Usage	Public transport usage counts Cycle counts		Delivery will be enhanced through use of existing partnership working
Mode share	Not measured directly – part of general traffic monitoring	Realisation involves other schemes	Delivery will be enhanced through use of existing partnership working



Measures	Monitoring	Benefits Realisation	Comments
Decongestion, air quality, noise, CO <sub>2</sub> emissions	Not measured directly – derived from usage	Realisation involves other schemes	
Growth (housing, jobs)	Not measured directly – derived from usage	Realisation involves other schemes, including non-transport (e.g. development)	
Wider economic benefits	Not measured directly – part of wider LGF package	Realisation involves other schemes, including non-transport (e.g. development)	Part of SELEP SEP Performance Management and Local Plan management

**Table 7-4: Benefits Realisation Plan** 

7.7.3 KCC will conduct a full evaluation of the impact of the scheme in the period after it is completed. The Council will prepare evaluation reports one year and five years after scheme opening, using the information to be collected as set out above to gauge the impact of the scheme on the traffic network, and assess the success of the scheme in meeting the objectives of the Sustainable Interventions scheme. Unexpected effects of the scheme will be reported upon and, where appropriate, remedial measures identified.

#### 7.8 Scheme Risks

7.8.1 As with any transport scheme there are a number of risks and issues that must be managed. Through the management arrangements established to progress the KSIP scheme, there are risk management arrangements in place. For the purposes of this Business Case, the main risks associated with proposed investment to progress the KSIP are summarised in Table 7-5.



Risk	Likelihood	Impacts	Owner	Mitigation
Scheme becomes unnecessary due to failure of wider main schemes	Low	High	ксс	Constant programme review and reallocation of funds
Stakeholders reject scheme as unsuitable or inappropriate	Low	Moderate	ксс	Active consultation, building on existing relationships
Highway design issues prove costly	Low	Moderate	Design Consultant	Early engagement of highway design specialists
Key stakeholders (e.g. LEP or DfT) insist on additional quantitative appraisal	Low	Moderate	Amey	Prepare Transport Business Case with as much quantitative information as possible
Related highway scheme designs affect scheme or scheme affects these schemes	Low	Moderate	Design Consultant	Co-ordination of design and explicit requirement in design brief
Benefits achieved do not match those predicted in the example used in the Business Case	Moderate	Moderate	ксс	Use scheme selection process to ensure best schemes are selected

**Table 7-5: Key Project Risks** 

- 7.8.2 In considering the need to manage the risks associated with this important scheme, there are considerable and possibly greater risks of not proceeding with the KSIP.

  These risks have previously been outlined and are as follows:
  - The constraints of the existing transport conditions will act as an inhibitor to growth with private sector investment attracted to other areas with better accessibility;
  - The significant pockets of disadvantage of Kent will worsen;
  - Kent's reputation as the UK's front door may be damaged without effective highway management; and
  - The ongoing Air Quality issues in Kent will be exacerbated without the mitigation afforded by the scheme.

**Project Name** Sustainable Interventions Supporting Growth **Document Title** 2018/19 LGF Transport Business Case Report



# **Appendix A S151 Officer Letter**